

WL3

Dynamic White Linear Flood Lights are suitable for scenarios such as bridges, ancient building facades, and stadiums. They deliver delicate and uniform lighting, creating an immersive effect akin to flowing water washing over walls. Supporting linear color temperature adjustment from 1800K to 6500K and sectional dimming control, they allow flexible color temperature gradients and zoned lighting combinations. The constant power function ensures consistent brightness by maintaining rated power output across the full color temperature range. With a lightweight design for easy installation, IP67-rated waterproofing, and reliable heat dissipation, these lights not only meet the atmospheric needs of venue performances but are also ideal for long-term architectural decorative lighting, infusing spaces with dynamic light and shadow.




TECHNICAL PARAMETER


Max. Power: 90W
Light source: 1800K-6500K
Luminous Flux: 8828lm
Peak Intensity: 25105cd(15°)
CRI: Ra: 90
Con Personality: DMX512, RDM

Operating voltage: AC220V-50/60Hz
Working Temperature: -20°C~45°C
Protection Level: IP67
Dimensions (L*W*H): 915*66*61mm
weight: 3.3kg


ANGLE

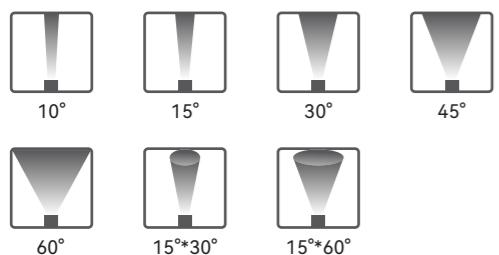

DIMENSIONAL DRAWING

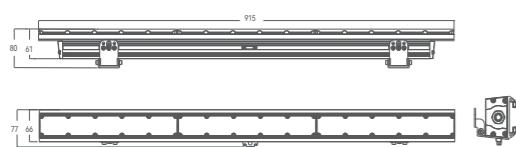

SPECIFICATIONS

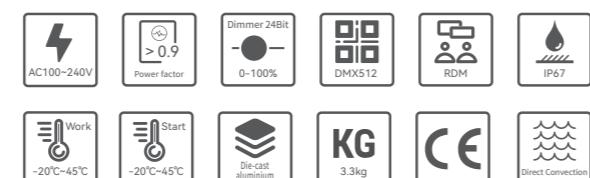

OPTIONAL ACCESSORIES




Data & Power Box (AM710)



End Termination Cap (6813100052)


LIGHT DISTRIBUTION DIAGRAM

(* THE ABOVE COLOR TEMPERATURES ARE ACHIEVED BY YAJIANG DIGITAL COLOR TECHNOLOGY AND CCS TECHNOLOGY)

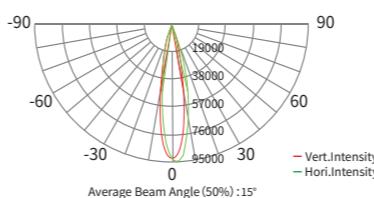


ALL BRIGHT

Lumen 7575lm
 Illuminance 901lx(5m)
 Peak Intensity 22557cd(15°)

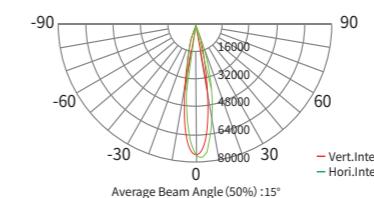

COLD WHITE

Lumen 8828lm
 Illuminance 1004lx(5m)
 Peak Intensity 25105cd(15°)

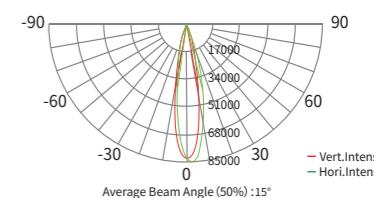

WARM WHITE

Lumen 7287lm
 Illuminance 846lx(5m)
 Peak Intensity 21170cd(15°)

ILLUMINANCE AT DISTANCE

