

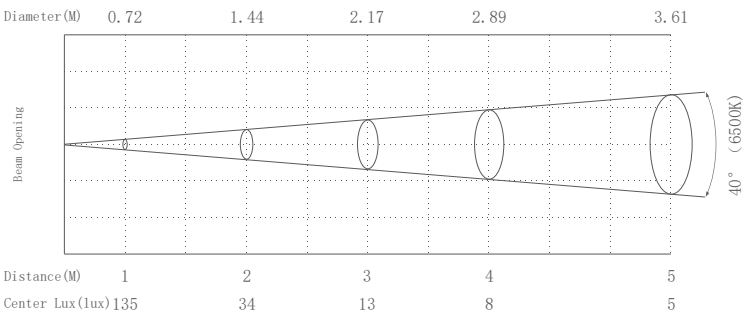
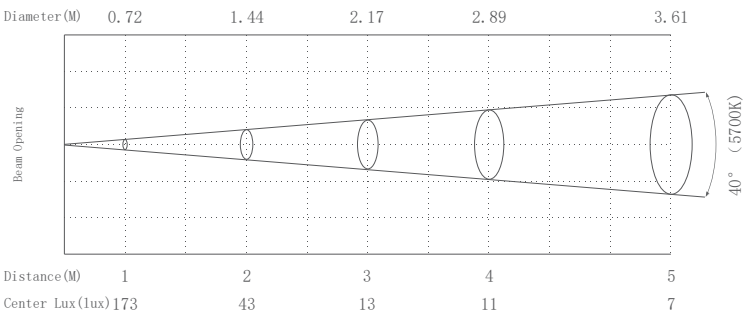
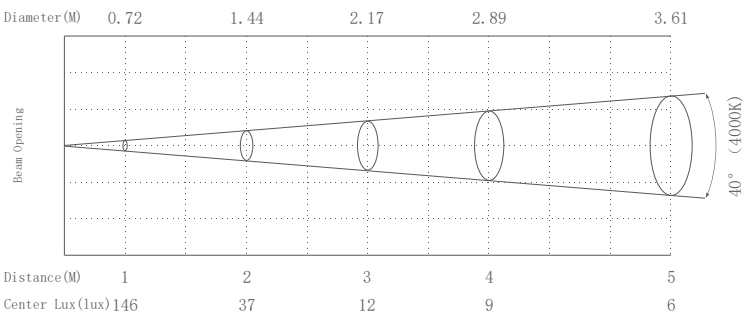


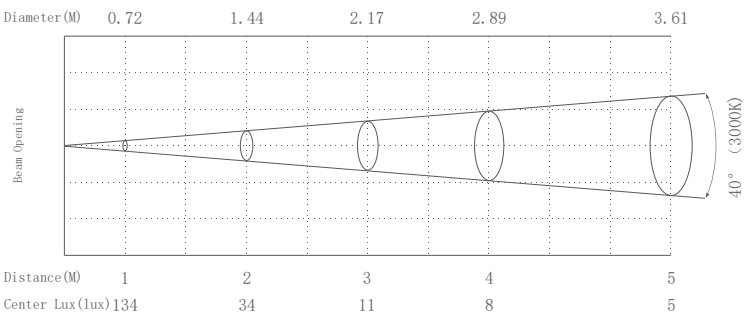

The core lighting device with full power range coverage features an RGBW four-color configuration paired with a high-performance color algorithm, vividly presenting “dopamine colors.” Aura Cylinder 8 is ideal for accent lighting, Aura Cylinder 20/Aura Cylinder 40 suit conventional spaces such as meeting rooms, while Aura Cylinder 60/Aura Cylinder 80 meet the needs of high-ceiling halls. Powered via CAT6 Ethernet cables for safe and easy maintenance, it offers tens of millions of dimming levels for smooth brightness transitions, blending practicality with

PHOTOMETRIC DATA

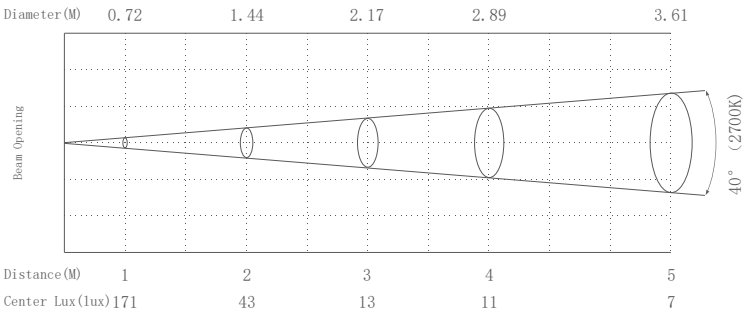

MAIN FUNCTION


Light source	RGBW
CRI	Ra:90
Luminous flux	136 lm
Angle	40°
Adjusting	CCS intelligent color management system
Hole size	Φ48mm

TECHNICAL PARAMETER


Aura Cylinder 8

Voltage	DC55V
Max.Power	8W
Size	50*50*103mm
Weight	0.16KG
Casing	Die-casting aluminum
Ambient Temp	-5℃ ~ +45℃
IP Rating	IP20
Certi cation	CE
Control	Network/RDM control, the software can be updated through the AD9191 Control Box via a web server. There are 2 RJ45 ports (DC55V power and network communication integrated into the Ethernet cable for input & output of communication.), with a maximum connection capability of 100W. The efficient distance from the Control Box to the Aura Cylinder 8 is 80meters.

14 PRESET CCT COLOR



24 PRESET COLORS



DIMENSIONS

