



A versatile solution for commercial space lighting, Aura Linear 3 and Aura Linear 6 offer flexible power options suitable for recessed slots and wall illumination. By integrating RGBW four-color technology with a high-performance algorithm, they outline architectural contours and create atmospheric lighting effects. The slim profile allows for discreet hidden installation, while the integrated CAT6 design ensures both safety and convenience. With 24-bit dimming for smooth and nuanced color transitions, these strips infuse any space with the emotional appeal of "dopamine colors," serving as the perfect finishing touch in lighting design.

MAIN FUNCTION

- Light source RGBW
- CRI Ra:90
- Luminous flux 720lm
- Angle 130°
- Adjusting CCS intelligent color management system
- Installation method Concealed installation

TECHNICAL PARAMETER

Aura Linear 6	
Voltage	DC55V/(IN&OUT)
Max.Power	15W
Size	598*47*50mm
Weight	0.22KG
Casing	Plastic material
Ambient Temp	-25°C ~ +45°C
IP Rating	IP20
Certification	CE
Control	Network/RDM control, the software can be updated through the AD9191 Control Box via a web server. There are 2 RJ45 ports (DC55V power and network communication integrated into the Ethernet cable for input & output of communication.), with a maximum connection capability of 100W. The efficient distance from the Control Box to the Aura Linear 6 is 80 meters.


14 PRESET CCT COLOR



24 PRESET COLORS



DIMENSIONS

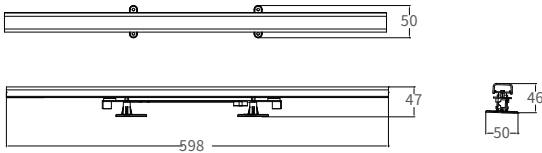

OPTIONAL



PHOTOMETRIC DATA

