



KS-D ARTLIGHT

"Purity in Light, Brilliance in Motion" serves as our design philosophy. We eliminate redundancy through a minimalist circular form and unidirectional lighting technology, while offering a range of optical and mounting accessories to expand the product's applicability. We are committed to providing a more flexible, efficient, and expressive lighting solution for architecture, landscape gardens, theme parks, mountain lighting projects, and artistic spaces.

WITH MINIMALIST AESTHETICS THE LAMPS THEMSELVES BECOME PART OF THE LANDSCAPE.

Effortless lines. A streamlined cylindrical form. Through the restrained ethos of industrial design, it integrates into diverse contexts—from gardens to architecture. More than a lighting instrument, it serves as a silent accent within the landscape.

Three Views



Front View



Rear View



Side View



RUGGED BUILD, ENGINEERED FOR ALL-DAY DEPENDABILITY.

The luminaire features a high-strength, one-piece die-cast aluminum body (ADC12), providing IP67-rated protection and withstanding extreme temperatures from -40°C to 45°C.



**Snowy and
windy conditions**



Scorching heat



**Thunderous
rainstorms**



EFFICIENT HEAT DISSIPATION ENSURES CONSISTENT LIGHT OUTPUT OVER TIME.

Featuring wraparound heat sink fins, a natural convection airflow design, and an intelligent temperature control system with an integrated breather valve to prevent condensation—effectively eliminating light degradation at its source.



TO CAST A SIGNATURE LIGHT FOR EVERY SCENE.

Offering a 15° beam angle and multiple high-quality secondary optical accessories to meet diverse lighting application needs.

Spherical cover



**Semi-circular
opal cover**



**Diamond
faceted cover**



**Honeycomb
anti-glare shield**




**Anti-glare
grille cylinder**



LIGHT AND SHADOW, AS THEY WERE ALWAYS MEANT TO BE— SEAMLESSLY ONE.

In the field of landscape lighting, we pioneered unilateral light-emitting optical technology — clean and sophisticated, with uniform light spots and enhanced overall integrity, giving the interplay of light and shadow a more dimensional quality.

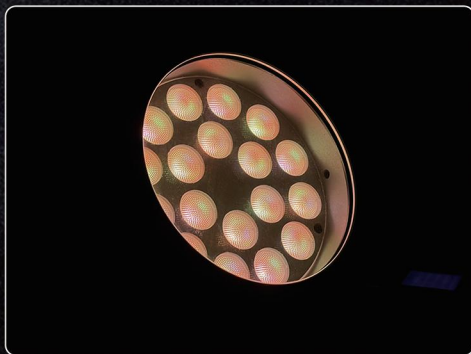

Multi-lens Optics







Single, homogenized Optics




PURITY IN LIGHT, RADIATING DYNAMIC BRILLIANCE.

With exceptional uniformity and integrity of the light spot, it exhibits no color aberration even at installation distances under 10 cm. Paired with an RGBL LED combination and RA85 color rendering, it delivers more than just brightness—it achieves a uniform and crystal-clear illumination.

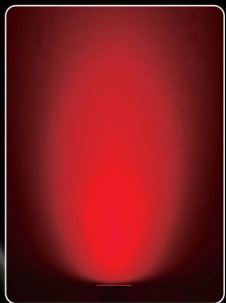


VERSATILE AND POWERFUL —DELIVERING RICH, IMPRESSIVE EFFECTS.

- It features 7 channel modes, including Pixel Mode and Performance Mode.
- Equipped with a built-in dim4 dimming system, it delivers smooth and subtle color transitions.
- Incorporates a digital color system and the CCS (Color Control System).
- Dimming enhanced to 0-100% with 24-bit resolution.
- Built-in linear color temperature range from 1800K to 10000K, plus 24 color macros.
- Featuring an adjustable strobe speed from 0 to 25 Hz, it is fully capable of meeting the demands of cultural tourism and live performance applications.

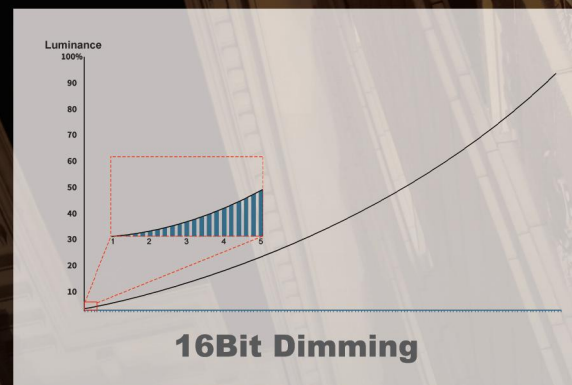


ENHANCED COLOR RENDITION ALONGSIDE VERSATILE MULTI-CHANNEL CONTROL.

Color Enhancement Technology boosts the average luminance value of different colored lights. Whether for single-color, dual-color, or tri-color mixing, it maximizes the power utilization of each color without increasing the rated power, delivering a 40% increase in single-color brightness, 45% for dual-color, and 33% for multi-color mixing.

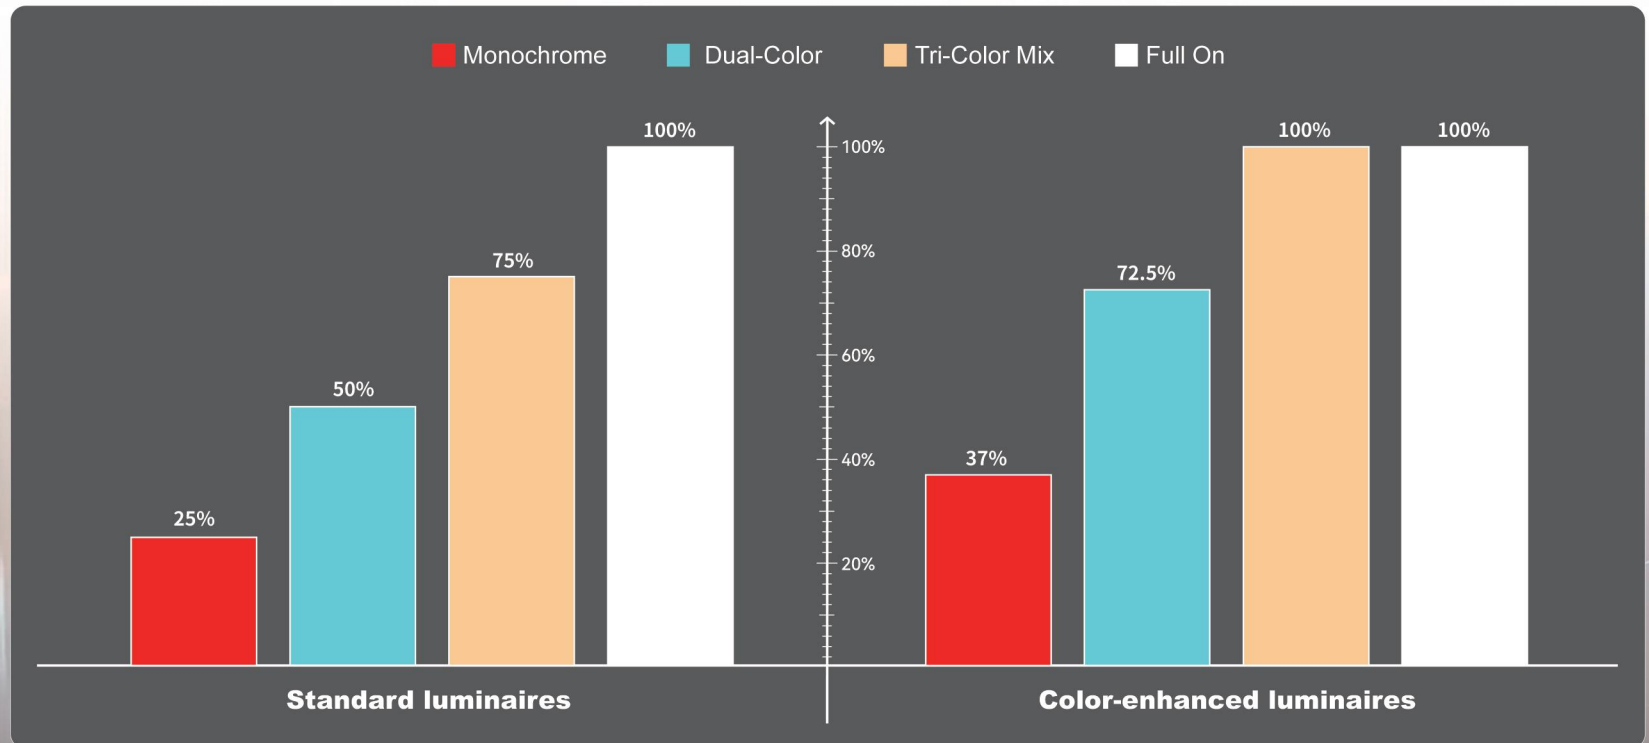


VERSATILE INSTALLATION FOR ANY ENVIRONMENT.


A wide range of modular installation accessories that easily meet diverse mounting needs, suitable for both indoor and outdoor applications.

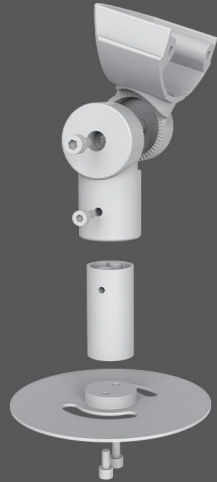


Single-arm bracket

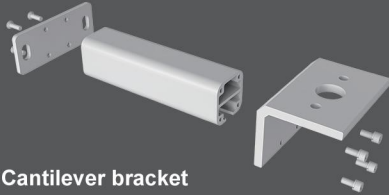


Cantilever bracket

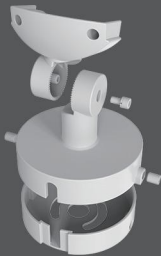

Concealed-wiring
single-arm bracket



U-bracket



Clamp bracket



Hoisting ring



KS-D



Model	KS-D
Light Source	RGBL
Rated Power	80W
Luminous Flux	3040lm
Peak Light Intensity	21853cd
Illuminance(5m)	868lux(15°)@5m
Beam Angle	15°
IP Rating	IP67
Dimensions	130x130x218.4mm(With the Hoisting Ring)
Weight	2.3KG



INSTALLATION SCENARIO DEMONSTRATION 1





INSTALLATION SCENARIO DEMONSTRATION 2



INSTALLATION SCENARIO DEMONSTRATION 3

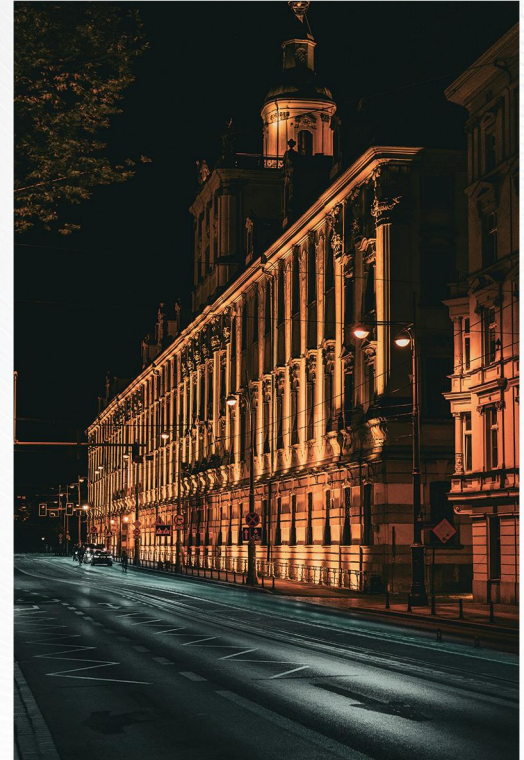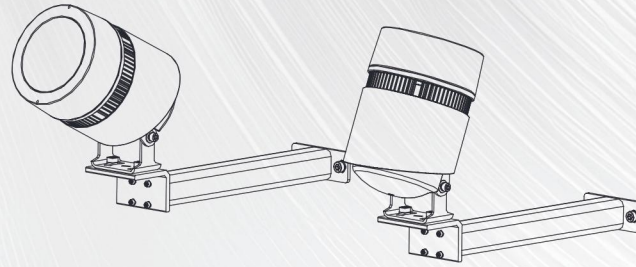

INSTALLATION SCENARIO DEMONSTRATION 4

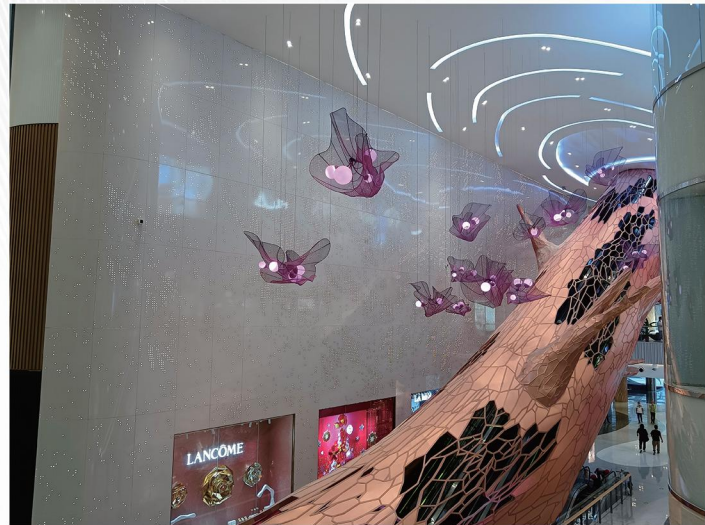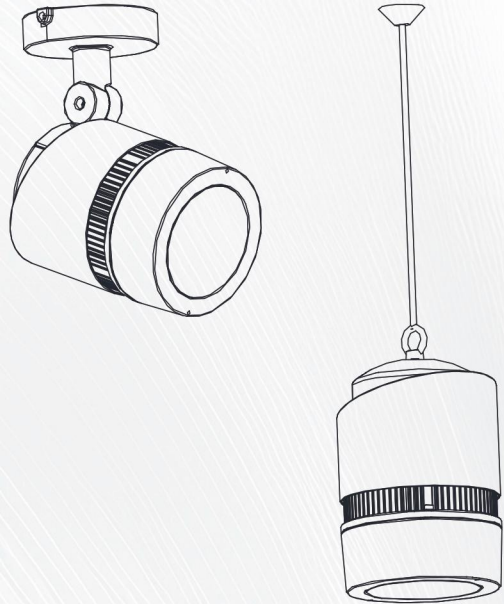

INSTALLATION SCENARIO DEMONSTRATION 5

